

# EXCEPTIONAL QUALITY... EXCELLENT PERFORMANCE... EXTRA EARNINGS!



OVER 5 DECADES  
OF ENGINEERING  
EXCELLENCE

## **BULL** HYDRAULIC REVERSIBLE PLOUGH



### **POWER PLOUGH**

Make the most of your tractor and get more profits with **BULL AGRO Reversible Plough!** **BULL AGRO**, one of the pioneers in quality farm equipment manufacturers in the country presenting a range of world-class heavy-duty highly durable Hydraulic Reversible Ploughs. When compared with manual ploughs Bull Reversible ploughs offer easy adjustments to different cutting widths according to various soil conditions, better area coverage and high-speed ploughing save lots of time and money. Lesser load on tractors results in high fuel savings and suitable for all kind of soils and all types of tractors.

An ISO 9001-2015 Certified Company



son of the soil



Hardest **STEEL BODY** Enriched with heat treated **ALLOY STEEL**



Suitable with all types of **TRACTORS**



**India's No.1** ROTARY TILLER BLADES

# 40% cheaper than imported ploughs! Quality at par!



## POWER PLOUGH HEAVY-DUTY AND LONG LASTING

### Hydraulic Cylinder for turning the plough with a single and double acting valve

- Suitable for all kind of soils: (No soil sticking on the mould boards, less fuel consumption & good area coverage).
- Easy adaptability to different types tractors by adjusting only the draw-bar shaft.
- Easy adjustment to different cutting widths by using turnbuckle.
- Working depths from 10" to 15" (254 to 381 mm).
- Shear bolt protective system.
- Low wear and tear due to heat treated parts.
- Long life and less stress for the tractor by shock absorbing alloy shaft.
- High inter body clearance for ploughing in hard obstacles.




ADJUSTABLE PLOUGH - BPP 250

### What makes BULL PLOUGH more powerful?



**Board angle adjustment system**  
According to different soil conditions the board angle can be easily adjustable.




**Shear bolts**  
Quickly replaceable shear bolts ensures overload protection. It protects the plough from stones, tree roots, rocky soil etc.



**Turn buckle cylinders**  
Adjust the furrow width according to soil conditions, crop and soil moisture level.



**Mould board assembly**  
Made of high wear resistance hardened steel with replaceable share point.

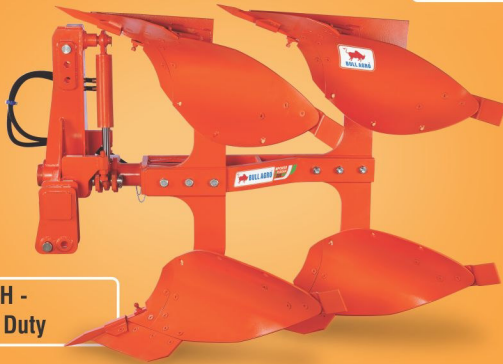

FIXED PLOUGH - BPP 450 Heavy Duty



FIXED PLOUGH - BPP 252

Specification & Models	BPP 252	BPP 380	BPP 450	BPP 450 Heavy Duty	BPP 027 Heavy Duty	BPP 470	BPP 250	BPP 650
Method of reverse	General purpose	General purpose	General purpose	General purpose	General purpose	General purpose	General purpose	General purpose
Type of Plough	Fixed	Fixed	Fixed	Fixed	Fixed	Adjustable	Adjustable	Adjustable
Number of the bottom	Two	Two	Two	Two	Two	Two	Two	Three
Working width	400 mm (16")	460 mm (18")	520 mm (20.5")	520 mm (20.5")	610mm (24")	480 - 660 mm (19" - 26")	540-740 mm (21" - 29")	810-1110 mm (32" - 43.5")
Working depth	254 - 304 mm (10"-12")	254 - 381 mm (10"-15")	254 - 381 mm (10"-15")	254 - 381 mm (10"-15")	254 - 381 mm (10"-15")	254 - 381 mm (10"-15")	254 - 381 mm (10"-15")	254 - 381 mm (10"-15")
Under frame point clearance	425mm	590mm	630mm	630mm	640mm	630mm	700mm	700mm
Inter Body clearance	520mm	645mm	660mm	660mm	780mm	660mm	860mm	860mm
Type of Share point	Bar point (Alloy steel - Specially Heat treated )	Bar point (Alloy steel - Specially Heat treated )	Bar point (Alloy steel - Specially Heat treated )	Bar point (Alloy steel - Specially Heat treated )	Bar point (Alloy steel - Specially Heat treated )	Bar point Alloy steel Specially heat treated )	Share point / Land side and Alloy steel-Specially heat treated-Optimal Designed	
Tractor engine speed	3-4km/hr	4-6km/hr	4-6km/hr	4-6km/hr	4-6km/hr	4-6km/hr	4-6km/hr	4-6km/hr
Size of the plough-LxWxH (Overall dimensions)	1150 x 700 x 950 mm	1710 x 870 x 1280 mm	1780 x 990 x 1360 mm	1780 x 1180 x 1360 mm	1970 x 1250 x 1380 mm	1960 x 990 x 1360 mm	2145x 1080 x 1490 mm	3000x 1365 x 1490 mm
Type of Soil to use	Medium & Light	Hard/ Medium & Light	Hard/ Medium & Light	Hard/ Medium & Light	Hard/ Medium & Light	Hard/ Medium & Light	Hard/ Medium & Light	Hard/ Medium & Light
Mould Board -thickness	6	6	6	6	8	6	8	8
Main frame size	223x207	255x220	327 x 240	345 x 245	398 x 245	SQ.90 x 8.5 THK	SQ.90 x 8.5 THK	SQ.90 x 8.5 THK
Turning mechanism	Mechanical	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Recommended tractor HP	20-25	35-40	45-50	45-50	50-55	45-50	50-55	65 and above
Weight	160 Kg	330 Kg	400 kg	440 kg	510 Kg	380 Kg	460 kg	580 kg
Overload protection	---	---	---	---	---	Share bolt	Share bolt	Share bolt

An ISO 9001-2015 Certified Company



Genuine spares and Service Support back-up (40% cheaper than imported Spares )

SERVICE TOLL FREE No: **1800-425-8191** Email: [customer@bullagro.com](mailto:customer@bullagro.com)

Distributor/Dealer



## BULL AGRO IMPLEMENTS

S.F.No. 200/1B6, Kannampalayam (PO), Ravathur Pirivu, Coimbatore - 641402, Tamilnadu, INDIA.  
Tel : +91 422 2688199/ 2682442, 2688166  
E-mail : [marketing@bullagro.com](mailto:marketing@bullagro.com)