Say 'NO' to manual weeding & harmful weedicide chemicals!



INTRODUCING INDIA'S FIRST PADDY POWER WEEDER WITH DIRECT WHEEL DRIVE FOR SUPERIOR TRACTION



POWER PADDY WEEDER

RISE AGRO; the rise of a new era in efficient farm management. The days of manual weeding in the rice paddy and use of hazardous weedicide chemicals are gone by. Now any rice farming can be converted into ORGANIC farming by completely eliminating the use of weedicides and fully avoid the Laborintensive and time-consuming manual weeding. Get assured yield up to 30-40% more, big savings on labour charges and on the cost of weedicides.

RISE AGRO is committed to provide innovative farming solutions; now proudly introduce the innovative POWER PADDY WEEDER developed with advanced Japanese know-how. Power packed with most advanced features make it more efficient and reliable when compared with any of its kind. Suitable for wetland paddy weeding and works even in deep mud field effortlessly.

AVAILABLE RANGE OF MODELS

3/5 ROWS



Power of agro innovation



The next gen paddy weeder!





SALIENT FEATURES

Direct wheel drive for superior traction FIRST TIME IN INDIA Heavy duty gear box Handle height adjustment thru cable lever for ergonomic operation. Optimum front rear balance for comfort during in field Easy push button to stop engine Specially designed stainless steel roller for removal of weeds effectively Perfectly designed large diameter cage wheel for driving the machine even in deep mud field Highly Reliable Petrol Engine with Service support Power weeder ranges are 3 & 5 rows Weeding can be done in fields with Inter Row of 25cm / 30cm.

SPECIAL FEATURES





GEAR BOX





HEIGHT ADJUSTMENT FACILITY


SPEED CONTROLLER





SS ROLLER

BEST PETROL ENGINE

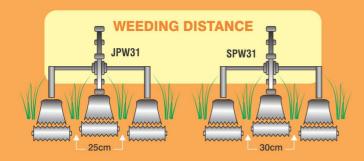

WEEDING CHART

(After planting follow this chart strictly to eliminate the weeds completely)

1 st Weeding	2 nd weeding	3 rd weeding
Should be done after 10 days	Should be done after 20 days	should be done after 30 days (if necessary)

Technical specifications

S.No	Description	Model # JPW31	Model # SPW31	Model # JPW51	Model # SPW51
1	Dimensions (mm)	1900 x 1420 x 995		2080 x 1530 x 995	
2	Field speed	1.5 to 2 Km/hr			
3	Row	THREE ROWS		FIVE ROWS	
4	Inter Row Spacing [in CM]	25CM	30CM	25CM	30CM
5	Turing radius	300 to 400 mm			
6	Maneuvering	Single Person Turning without lifting			
7	Handle	Adjustable clutch type			
8	ON/OFF engine	Switch control			
9	Wheel	Rugged steel wheel			
10	Area coverage	0.5 to 0.6	Acre / hr	0.6 to 0.7 Acre / hr	
11	Weight in Kg [Approx]	4	3	48	
12	Engine Capacity	2HP			

Description Horse power 3 47.9 Engine RPM 7000 Fuel Petrol Centrifugal 6 Clutch Starting Recoil start

> **Genuine spares and** Service Support back-up

SERVICE TOLL FREE No: 1800-425-8191 Email: customercare@bullagro.com

Disclaimer: The above information based on weeding operations done by experts under controlled environment and it may subject to vary according to different soil conditions and individual weeding skills.

Manufactured & marketed by:

BULL AGRO IMPLEMENTS

S.F.No. 200/1B6, Kannampalayam (PO), Ravathur Pirivu, Coimbatore – 641402,

Tamilnadu, INDIA. Tel: +91 422 2688199/ 2682442, 2688166 E-mail: marketing@bullagro.com website: www.bullagro.com

Distributor/Dealer